


Military Cable

This assembly cable kit includes a set length of cable, special connectors on both ends, and a reel for distributing and retrieving.

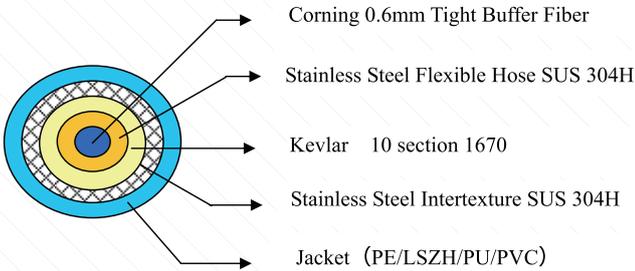

Advantages:

- All dielectric high mechanical performance and wide operation temperature range cable.
- Standard neutral click lock connector, water resistant and dust protecting.
- Neutral connectors that can direct connect between socket and flanging socket, socket and socket, flanging socket and flanging socket.
- The orientation pin design ensures fast blind connection, and the precision ferrule makes the interchangeable and repeatable connection better performance.
- Special design reel with automatic cable arranger for fast,-easy distribution and retrieving.

Specifications:

Fiber count	1,2,4,6
Wavelength	1310nm/1550nm(Single-mode fiber)
Typical Attenuation(1000m)	≤1.0dB@1310nm、≤0.85Db@1550nm
Connector Type	Neutral Click Lock
Max. Tensile Load	1200N
Crush Resistant	3000N/100mm
Operation Temperature	PE : -20~+40°C
	PU : -20~+70°C
	PVC : -40~+85°C
	LSZH : -20~+60°C
Repeated Connecting	≥1000 Times
Kit Size	φ500*460mm
Gross Weight	≤100kg

