


Collimator

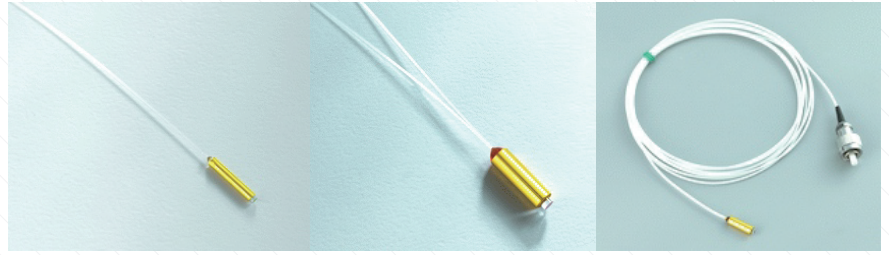

Specification

Item	Single fiber		Dual fiber	
	Premium	A Grade	Premium	A Grade
Operating Wavelength (nm)	1310/1550, 1260~1620 or Customized		1310±20, 1550±20	
Insertion Loss (dB)	≤0.18	≤0.20	≤0.30	≤0.35
Return Loss (dB)	60			
Receive angle (degree)	±0.15			
Facula diameter(mm)	<0.5			
Optical Power Handling (mW)	≤500			
Operating Temperature (°C)	-10°C ~ 70°C			
Storage Temperature (°C)	-40°C ~ 85°C			
Fiber Type	SMF-28, MMF50/125um or MMF62.5/125			
Fiber Length (Min.)	1 Meter Each End 0.25mm or 0.9mm			
Package Dimension (mm)	φ2.78*10mm or φ3.2*10mm or customized			